


# REACH B-LI P AND B-LI HP

- › Enabling users to be fully involved in group conversations with Multi-Voice Focus
- › With My Voice 2.0, the sound of the user's own voice stays comfortable with a dedicated processing separated from the target speech sounds
- › Convenient window in the housing for display of serial number
- › Hands-free phone calls via Headset Mode with Call Control when connected via MFi or LE Audio
- › Tamper-proof rocker switch and earhook
- › Lifeproof to withstand everyday challenges
- › ATEX certified\*
- › AI with Rexton Assist helps you to seamlessly customize your hearing aids



## REACH B-LI P


- › Rechargeable solution for a full days use:
- › B-Li P delivers up to 30h runtime (incl. 5h of streaming) or up to 35h (without streaming).

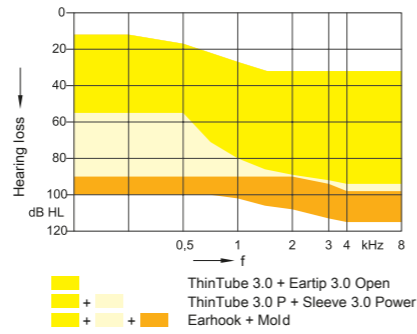

**Earhook**  
• 77 dB / 135 dB SPL (2 ccm coupler)  
• 82 dB / 139 dB SPL (Ear simulator)

## REACH B-LI HP

- › Rechargeable solution for a full days use:
- › B-Li HP delivers up to 65h runtime (incl. 5h streaming) or up to 73h (without streaming).

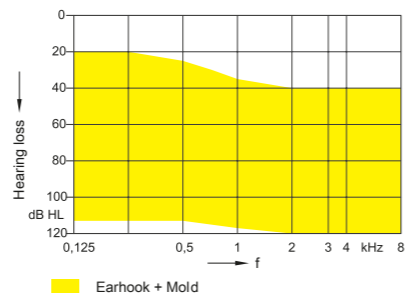

**Earhook**  
• 82 dB / 140 dB SPL (2 ccm coupler)  
• 85 dB / 143 dB SPL (Ear simulator)

\* The ATEX certificate is planned to be available within six months after launch.

Features / Performance Level	80	60	40		
Channels/Controls/Programs	48/20/6 <sup>1)</sup>	36/18/6	32/16/6		
LED	•	•	•		
T-coil	•	•	•		
Bluetooth	•	•	•		
Tinnitus Sound function	•	•	•		
Tinnitus Notch function <sup>2)</sup>	•	•	•		
Wireless sync	•	•	•		
IP68	•	•	•		
XPhone	•	•	•		
<b>Technology Highlights</b>					
Multi-Voice Focus	•	•	•		
Focus Beams	4	2	1		
Voice Stabilizer	•	•	•		
Speech Preservation Technology	•	•	•		
My Voice 2.0	•	•	•		
Motion sensor for scene analysis	•	•	•		
<b>Directionality</b>					
Auto Dir	•	•	•		
Directional Adaptive	•	•	•		
iOmni Sound Locator	•	•	•		
Auto iFocus 360	•	-	-		
iFocus 360	•	•	-		
Auto Focus 360	-	•	-		
Auto Stereo iLock	•	•	•		
OneMic Directionality	-	-	-		
<b>Noise Reduction</b>					
Noise Management	•	•	•		
Sound Smoothing	•	•	•		
Wind Noise Reduction	•	•	•		
Auto Echo Reducer	•	-	-		
Reverb Reducer	•	•	-		
<b>Sound Quality &amp; Control</b>					
Bandwidth extension <sup>2)</sup>	•	-	-		
Bandwidth compression	•	•	•		
Feedback Preventer	•	•	•		
Music Enhancer (presets)	3	3	1		
Automatic Acclimatization	•	•	•		
<b>Audio Streaming</b>					
Bluetooth Classic	-	-	-		
LE Audio	•	•	•		
MFi	•	•	•		
ASHA	•	•	•		
<b>Headset Mode</b>					
Bluetooth Classic	-	-	-		
LE Audio	•	•	•		
MFi	•	•	•		
<b>TeleCare</b>					
Full live remote tuning	•	•	•		
Basic portal remote tuning	•	•	•		
<b>Accessories &amp; Apps</b>		<b>Chargers</b>		<b>CROS</b>	
Smart Key	•	Charging Station	•	Reach CROS R-Li T BC	-
TV Sound	•	Travel Charger	-	Reach CROS R-Li	•
Smart Transmitter 2,4	•	Charging+ Station	•	Reach CROS SR	-
Smart Mic	•	IF CIC Travel Charger	-	Reach CROS iX-CIC Li	-
Rexton App	•	Travel Charger Custom CIC	-		
		Universal Cable Charger	•		
<b>Programming</b>					
Noahlink Wireless	•				
ConnexxAir	-				
HI-PRO	-				

1) 34/16/6 for B-Li HP  
2) Not available for B-Li HP